



MS2520CT SERIES ~ Low Profile Ceramic Chip Inductors




PART NUMBERING SYSTEM

MS	2520CT	—	10NJ	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

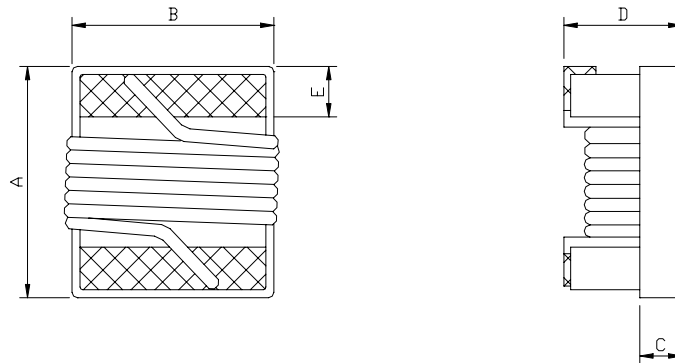

A=2.92 Max. B=2.79 Max. C=0.51 Ref. D=1.27 Max. E=0.51 Ref.

RECOMMENDED PATTERNS

UNIT : mm

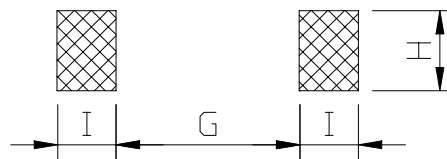

G=1.27 H=2.54 I=1.02



RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (nH)	TOLERANCE	Q. MIN.	SRF (GHz) MIN.	DCR (Ω) (max)	IDC (mA) (max)
MS2520CT-4N7X-LF	4.7@50MHz	B,S	28@500MHz	7500	0.15	600
MS2520CT-8N2X-LF	8.2@50MHz	B,S	40@500MHz	5000	0.22	600
MS2520CT-10NX-LF	10@50MHz	K,J,G	40@500MHz	2700	0.25	600
MS2520CT-15NX-LF	15@50MHz	K,J,G	40@500MHz	3000	0.22	600
MS2520CT-20NX-LF	20@50MHz	K,J,G	50@500MHz	2400	0.33	600
MS2520CT-30NX-LF	30@50MHz	K,J,G	50@500MHz	2400	0.38	600
MS2520CT-40NX-LF	40@50MHz	K,J,G	60@500MHz	2000	0.43	600
MS2520CT-50NX-LF	50@50MHz	K,J,G	60@500MHz	1900	0.48	600
MS2520CT-60NX-LF	60@50MHz	K,J,G	60@500MHz	1800	0.52	600
MS2520CT-70NX-LF	70@50MHz	K,J,G	60@500MHz	1700	0.55	510
MS2520CT-80NX-LF	80@50MHz	K,J,G	60@500MHz	1400	0.56	510
MS2520CT-90NX-LF	90@50MHz	K,J,G	65@500MHz	1400	0.61	500
MS2520CT-R10X-LF	100@50MHz	K,J,G	60@500MHz	1000	0.63	480




MS2520CT SERIES ~ Low Profile Ceramic Chip Inductors

TYPICAL ELECTRICAL CHARACTERISTICS



RoHS Compliant

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

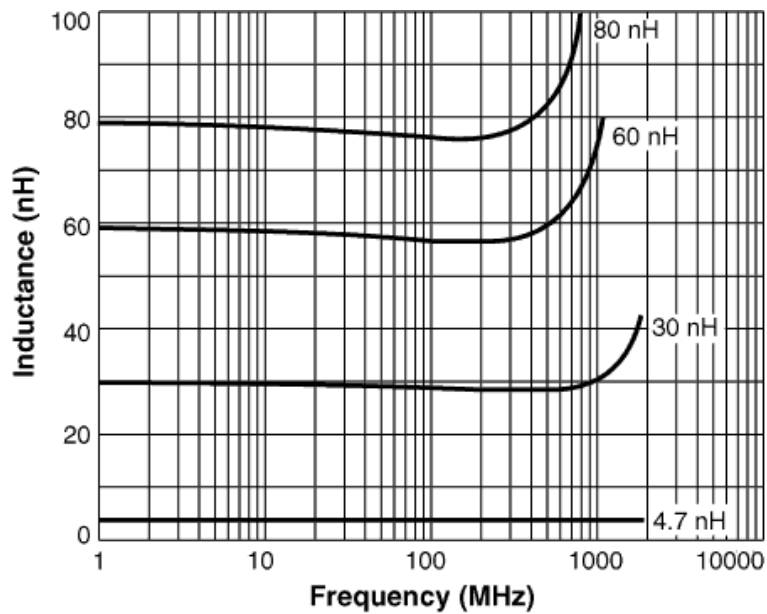

Q vs. FREQUENCY CHARACTERISTICS

